


## dGLink Kat. 6 UTP 305m Hvit - LSZH - ø 5,4mm

UTP 4X2X23AWG CAT.6EX 100 OHM LSZH

Art.No.: 10614305

### Cross Section

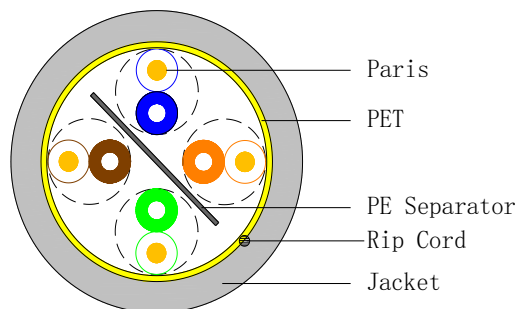

### Cable Description

#### Conductor

Material	Bare Copper
Stranding	Solid
Wire Gage	23AWG
Dia.(+/-0.005mm)	0.54

#### Insulation

Material	HDPE
Dia.(+/-0.05mm)	0.98
Color Code	WH/BL & BL WH/OG & OG WH/GN & GN WH/BN & BN

#### Paired

#### Cabling

Order of the Pair	See the Cross Section
Filler	PE
Wrapping	PET

#### Outer Sheath :

Material	LSZH
Thickness(+/-0.05mm)	0.54
Dia.(+/-0.2mm)	5.40
Rip cord	200D*3

### Mechanical Characteristics

#### Reference Standard: UL 444

Test Material	LSZH
Before Tensile Strength(Mpa)	≥8.3
Aging Elongation(%)	≥100
After Tensile Strength(% of unaged)	≥75
Aging Elongation(% of unaged)	≥75
Cold Bend(-20±°Cx4hrs)	No crack
Operating Temperature Range	-20~+70°C
Min.Bend Radius(Install)	8xD

### Revision History

Define by: Bob	Rev: A/3
Prepared by: King	Date: 2019-10-26
Approved by: Gavin	Page: 1 of 1
Part No.: 3603F	

### Electrical Characteristics

#### Reference Standard: ANSI/TIA-568.2-D

#### Test Item(20°C)

Test Item	Units	Spec
1.Max.Conductor DC Resistance	Ω/km	93.8
2.Max.Unbalance of Pair DC Resistance	%	2.5
3.Dielectric Strength between Pairs	kV/min	DC1.0
4.Min.Insulation Resistance	MΩ·km	5000
5.Max.Pair Mutual Capacitance	nF/100m	5.6
6.Max.Pair Capacitance Unbalance	pF/100m	330
7.Impedance(1 to 250MHz)	Ω	100±15
(100 to 200MHz)	Ω	100±22
(200 to 250MHz)	Ω	100±25

Frequency (MHz)	Min.RL (dB)	Max.IL (dB/100m)	Min. NEXT(dB)	Min.PS NEXT(dB)
1	20.0	2.0	74.3	72.3
4	23.0	3.8	65.3	63.3
8	24.5	5.3	60.8	58.8
10	25.0	6.0	59.3	57.3
16	25.0	7.6	56.2	54.2
20	25.0	8.5	54.8	52.8
25	24.3	9.5	53.3	51.3
31.25	23.6	10.7	51.9	49.9
62.5	21.5	15.4	47.4	45.4
100	20.1	19.8	44.3	42.3
200	18.0	29.0	39.8	37.8
250	17.3	32.8	38.3	36.3

Frequency (MHz)	Min.ELFEXT (dB)	Min.PS ELFEXT(dB)	Max.Delay (ns/100m)	Max.Delay skew(ns/100m)
1	67.8	64.8	570	45
4	55.8	52.8	552	45
8	49.7	46.7	547	45
10	47.8	44.8	545	45
16	43.7	40.7	543	45
20	41.8	38.8	542	45
25	39.8	36.8	541	45
31.25	37.9	34.9	540	45
62.5	31.9	28.9	539	45
100	27.8	24.8	538	45
200	21.8	18.8	537	45
250	19.8	16.8	536	45

### RoHS 3.0 Guideline

Cadmium content (Cd)	< 0.01%(100ppm)
Lead content (Pb)	<0.1% (1000ppm)
Mercury content (Hg)	<0.1% (1000ppm)
Chromium (VI) content	<0.1% (1000ppm)
Polybrominated Biphenyls (PBB)	<0.1% (1000ppm)
Polybrominated Diphenyl Ether (PBDE)	<0.1% (1000ppm)
Diethyl hexyl phthalate (DEHP)	<0.1% (1000ppm)
Butyl phenyl phthalate (BBP)	<0.1% (1000ppm)
Dibutyl phthalate (DBP)	<0.1% (1000ppm)
Diisobutyl phthalate (DIBP)	<0.1% (1000ppm)

### dGroup as

Narverødveien 40 3113 Tønsberg / PB. 7, 3113 Tønsberg  
Tel : +47 33 32 94 30  
Epost : nettbutikk@dgroup.no  
Http://www.dgroup.no