



# Cat.6 UTP PATCH CODE ( T568B ) ( Assembly Boot )

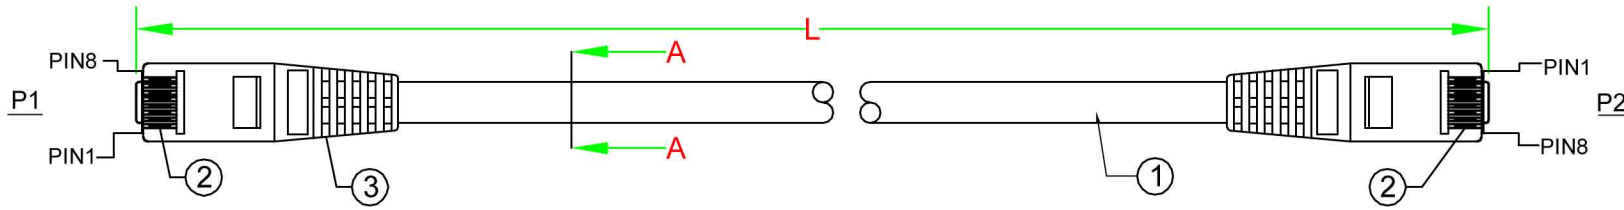

### CABLE SPECIFICATION:

**CONDUCTOR :** 4PR/24AWG (18 lb, STRANDED)  
**CORE COLOR :** Pair 1 : WHITE/BLUE\*BLUE  
 Pair 2 : WHITE/ORANGE\*ORANGE  
 Pair 3 : WHITE/GREEN\*GREEN  
 Pair 4 : WHITE/BROWN\*BROWN  
**JACKET :** PVC.


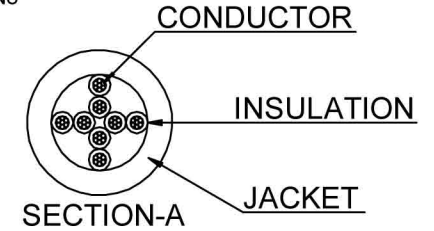


### NOTES:

#### LENGHT(L)

500	±20mm
1000	±20mm
1500	±30mm
2000	±30mm
3000	±50mm
5000	±50mm

### WIRING DIAGRAM(T568B)

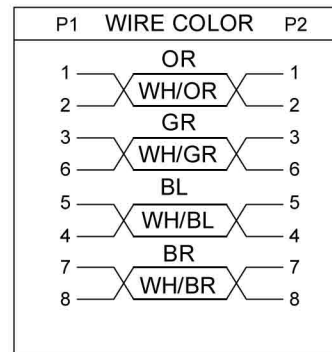

③	BOOT : PVC slime type with latch protect cover	2 PCS
②	CAT.6 3 pcs type 8P8C 50u" PLUG	2 PCS
①	CAT.6 UTP 24AWG 4PAIR	L
NO.	DESCRIPTION	Q'TY

DRAW NO:		ITEM NO:	CBL-61UXMX
	APPR	CUSTOMER:	
UNIT:	m/m	DATE:	Feb. 29 , 2012
SCALE:	DESIGN	TOLERANCE:	

Narverødveien 40 3113 Tønsberg

