




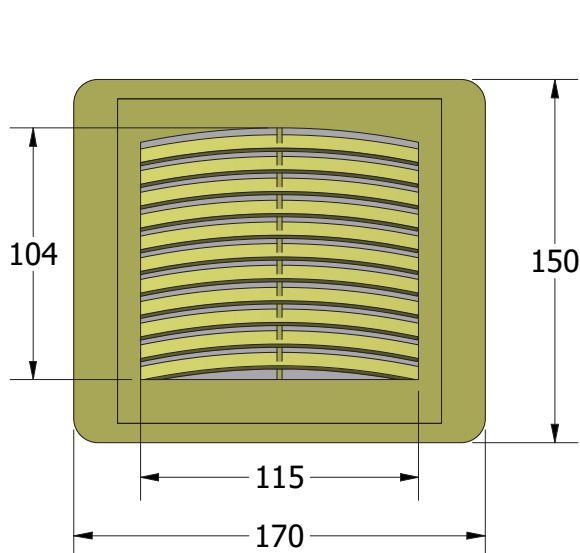


Front View

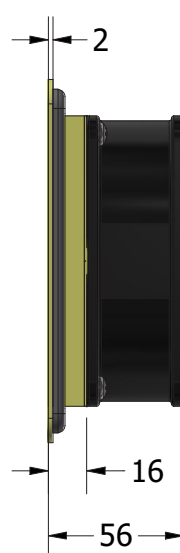


Side View

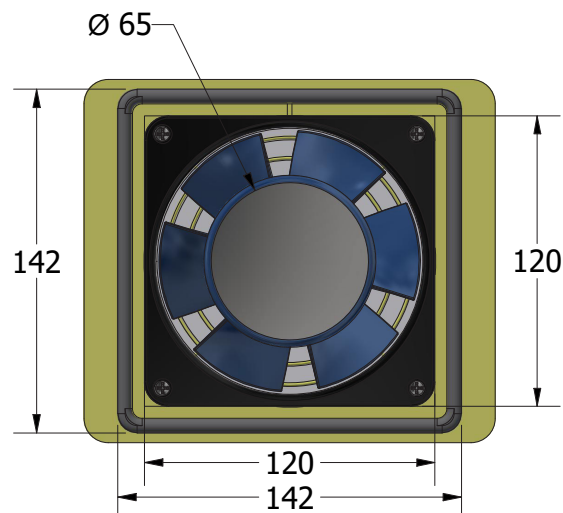

Rear View

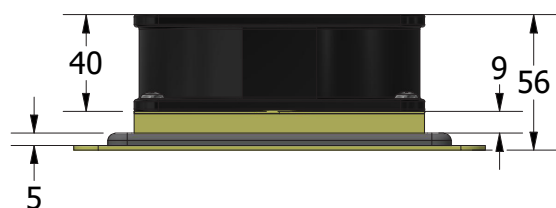

Top View

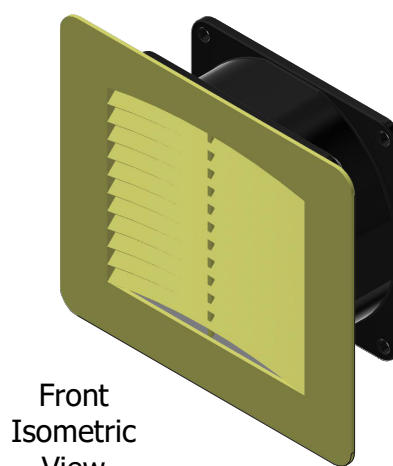

Front
Isometric
View



12038

AC AXIAL FAN
120x120x38mm




General Specification

BRK12038 AC FAN	
1. IMPELLER	PBT11 HERMOTASTIC BLACK UL 94 V0
2. FRAME	ALUMINUM ALLOY
3. MOTOR	SHADED POLE INDUCTION MOTOR
4. OPERATION TEMPERATURE	+10C ± +60C
5. SAFETY	CE> CUL>TUV
6. WEIGHT	300G
7. PROTECTION	IMPEDANCE PROTECTED
8. CONNECTING	WIRE LEADS & TERMINAL
9. LEAD WIRE	AWG # 22 UL 1007 (OP.FINAL)
10. EXPECTED LIFE	60C 90,000 HOURS

Specification

MOOEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	ÖZVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ	
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	AIR FLOW	
								M3/Hr	CFM
BRK12038BASL	SLEEVÉ	110/125	50/60	0,28	22	2700/3000	40/48	138/162	82/95
BRK12038BA1sL	SLEEVE	220/240	50/60	0,14	22	2700/3000	40/48	138/162	82/95
BRK12038BAL	BALL	110/125	50/60	0,28	22	2700/3000	40/48	138/162	82/95
BRK12038BA2BL	BALL	220/240	50/60	0,14	22	2700/3000	40/48	133/162	82/95

Dimension

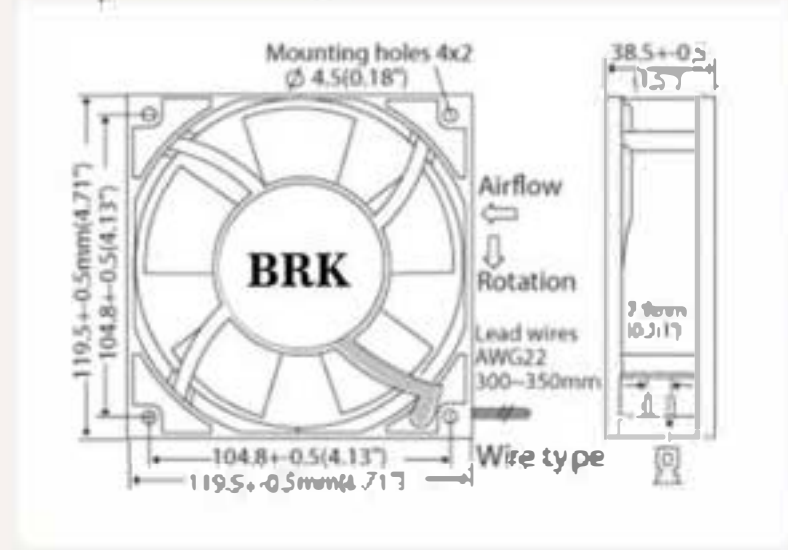

Air performance

