
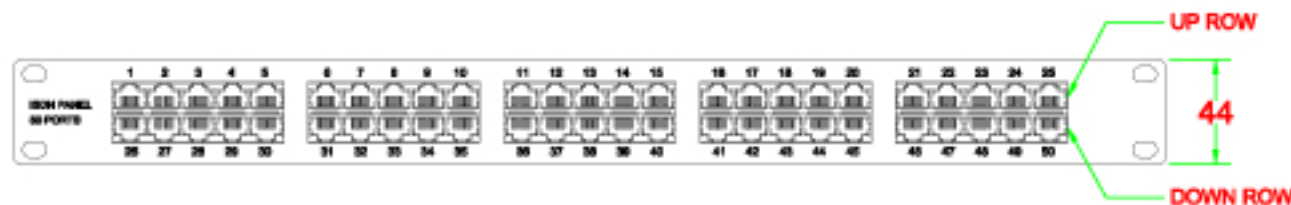
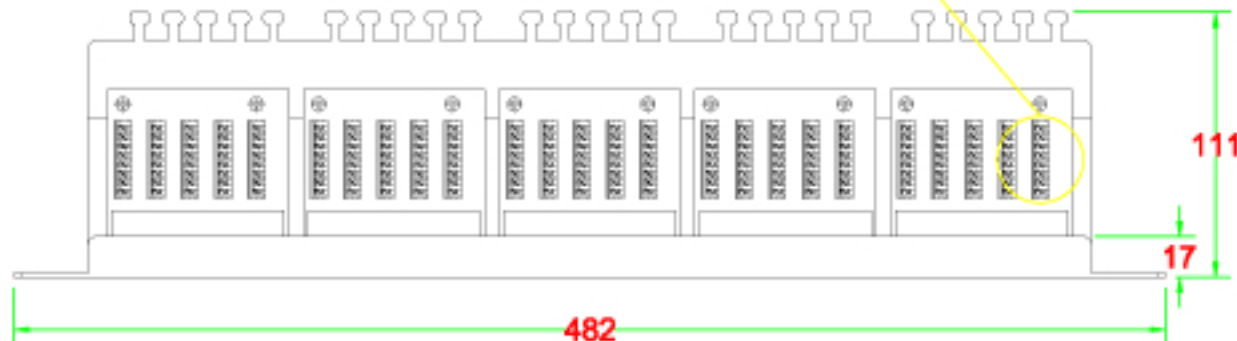


50 Ports ISDN Patch Panel / Dual Type



Materials :

Bottom Panel : Metallic Panel (SPCC)

RJ-45 Jack : Housing-PBT /

8P8C 6 micro inches gold plated /

PCB : FR-4 / 1.6mm UL-94V0

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C



DRAW NO:		ITEM NO:	ISDN-50KRB
UNIT: mm	APPR	CUSTOMER:	
SCALE:	CHECK	DATE:	
	DESIGN	TOLERANCE:	± 1 ± X ± 0.2 ± XX ± 0.15

dGroup as